Overview

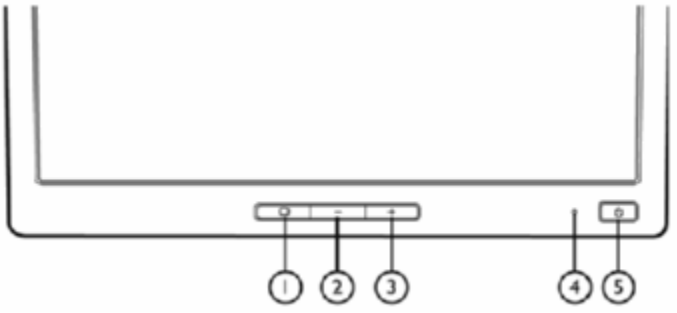

1. Button 1: Menu selection
2. Button 2: Menu "-" selector button
3. Button 3: Menu "+" selector button
4. Button 4: Power LED
5. Button 5: Power button

Models

PX848AA

Technical Specifications

Panel	**Type**	15-inch Active Matrix TFT (thin film transistor)
	Viewable Image Area (diagonal)	15 in (38.1 cm)
	Screen Opening (W x H)	12.0 x 9.0 in (30.6 x 23.0 cm)
	Viewing Angle (typical)*	130 degrees horizontal/100 degrees vertical (10:1 minimum contrast ratio)
	Brightness (typical)*	250 nits (cd/m^2)
	Contrast Ratio (typical)*	450:1
	Pixel Pitch	0.297 mm
	Color Depth Support	> 16 million colors
	*__NOTE:__ All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.	
On Screen Display (OSD) Controls	**Buttons or Switches**	3-button OSD (menu, minus, plus); power on/off
	Languages	English, French, German, Spanish, Italian, Dutch, Simplified Chinese
	User Controls	Image Control (auto, horizontal, vertical)
		Positioning (vertical and horizontal)
		Color Temperature (6500k, 9300k, Custom)
		Brightness
		Contrast
		Clock, Clock Phase
		Monitor Management (power saver, sleep)
		Factory Reset
Signal Interface/ Performance	**Horizontal Frequency**	30 to 61 kHz
	Vertical Frequency	56 to 76 Hz
	Graphics Controller	Genesis, MStar
	Native Resolution	1024 x 768 @ 60 Hz (recommended)
	Maximum Resolution (Digital)	N/A
	Preset VESA Graphic Modes (non-interlaced)	1024 x 768 @ 60 Hz, 70 Hz, and 75 Hz
		832 x 624 @ 75 Hz (Mac)
		800 x 600 @ 60 Hz, 72 Hz, and 75 Hz
		720 x 400 @ 70 Hz
		640 x 480 @ 60 Hz, 72 Hz, and 75 Hz
	Maximum Pixel Clock Speed	80 MHz
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 degrees Kelvin
Video Input	**Plug and Play**	Yes
	Input Signal	15 pin D-sub (Analog VGA)
	Input Impedance	75 ohms (2 % value change allowed)
	Sync Input	TTL separate synch
	Video Cable	Detachable 15-pin D-sub mini connector

Technical Specifications

	Video Cable Length	70.8 in (1.8 m)	
Power	**Input Power**	100 ~ 240 VAC	
	Nominal Current	< 0.50 Ampere	
	Frequency	50 ~ 60 Hz	
	Typical Power Consumption	21 watts	
	Maximum	< 23 watts	
	Power Saving	< 2 watts	
	Power Cable Length	74.8 in (1.9 m); detachable	
Mechanical	**Dimensions** (H x W x D)	**Unpacked with stand**	13.9 x 13.4 x 7.9 in (35.5 x 34.0 x 20.3 cm)
		Display Head only	11.4 x 13.4 x 2.4 in (29.0 x 34.0 x 6.0 cm)
		Packaged	15.6 x 15.6 x 5.9 in (39.5 x 39.5 x 15.0 cm)
	Weight	**Unpacked**	7.05 lb (3.2 kg)
		Packaged	9.92 lb (4.5 kg)
	Tilt Range	-5 to +30 degrees vertical tilt	
	Swivel Range	None	
	Height Adjustable	No	
	Pivot Rotation	No	
	Base and Stand	Detachable	
Environmental	**Temperature – Operating**	50° to 95° F (10° to 35° C) non-condensing	
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 90%	
	Altitude – Operating	0 to 12,000 ft (0 to 3,658 m)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,100 m)	
Options	**HP Flat Panel Speaker Bar – Part number: EE418AA**	Powered directly by the monitor, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.	
	HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B	Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 or dc7600 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document.	
Other	**Accessories Included**	Detachable VGA cable, detachable AC power cord, documentation kit, and user CD.	
	Software	HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.	
	User Guide Languages	English, Brazilian Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish	
	Warranty Languages	**Americas**	English, Canadian French

		LA	Spanish, Brazilian Portuguese
		EMEA	English, Danish, Dutch, Finnish, European French, German, Italian, Norwegian, Castilian Spanish, Swedish
		Asia/Pacific	English, Bahasa, S. Chinese, T. Chinese, Korean, Japanese, Chinese
	Color	Carbonite	
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)	
	Kensington Lock-ready	Yes	
Certification and Compliance	9241-3,7,8 VDT guidelines, ISO 13406-2 pixel defect guidelines, MPR-II, CISPR, VCCI, CSA (Canada), ACA (Australia), TUV and GS Mark (German ergonomic), BSMI (Taiwan), CCC (China), MIC (South Korea), NOM (Mexico), Eastern European approvals, CE Marking, FCC approval, Energy Star, TCO '03 (emissions, ergonomics, environment), Microsoft® Windows® certified (Microsoft Windows 2000 and Microsoft Windows XP), UL listed, GOST (Russia), SASO (Saudi Arabia)		
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.		
Service and Warranty	Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.		

© 2005 Hewlett-Packard Development Company, L.P.

Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.